

FIG.1


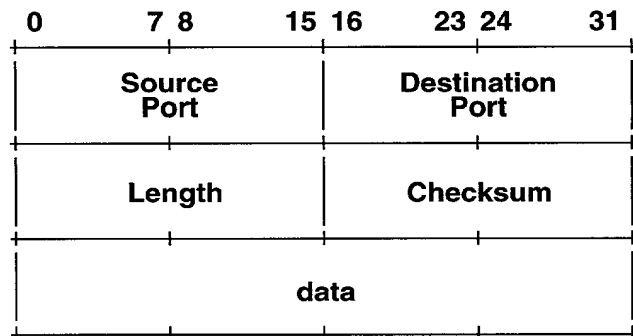


FIG.2

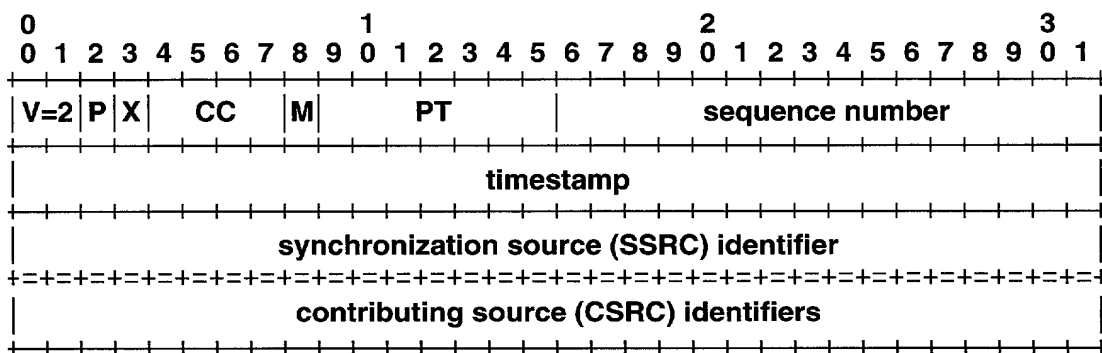

version (V) : 2 bits
 padding (P) : 1 bit
 extension (X) : 1 bit
 CSRC count (CC) : 4 bits
 marker (M) : 1bit
 payload type (PT) : 7 bits
 sequence number : 16 bits
 timestamp : 32 bits

FIG.3

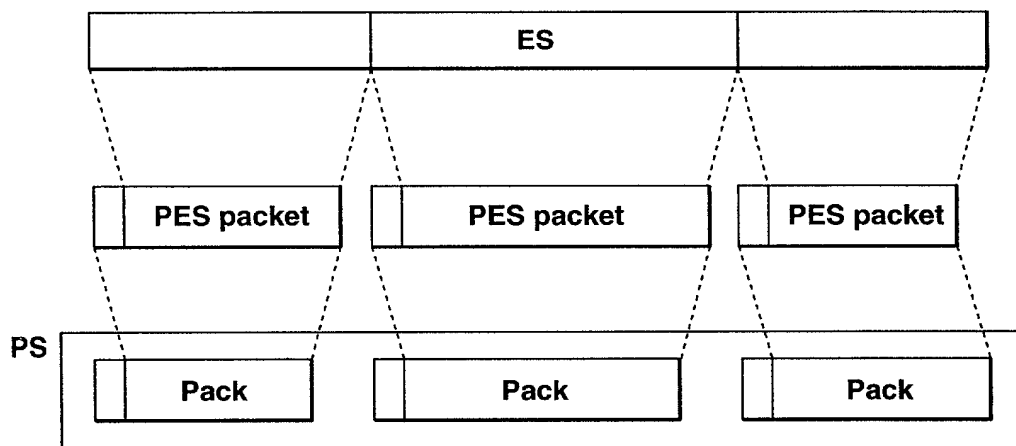


FIG.4

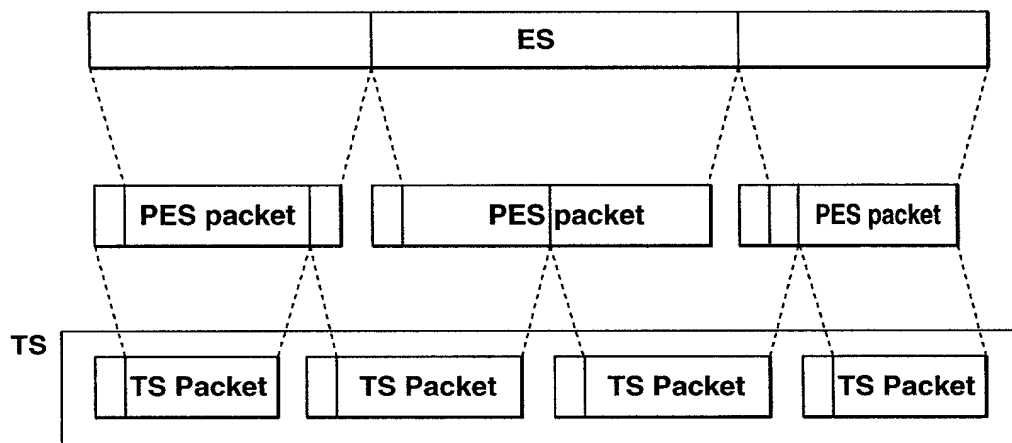


FIG.5

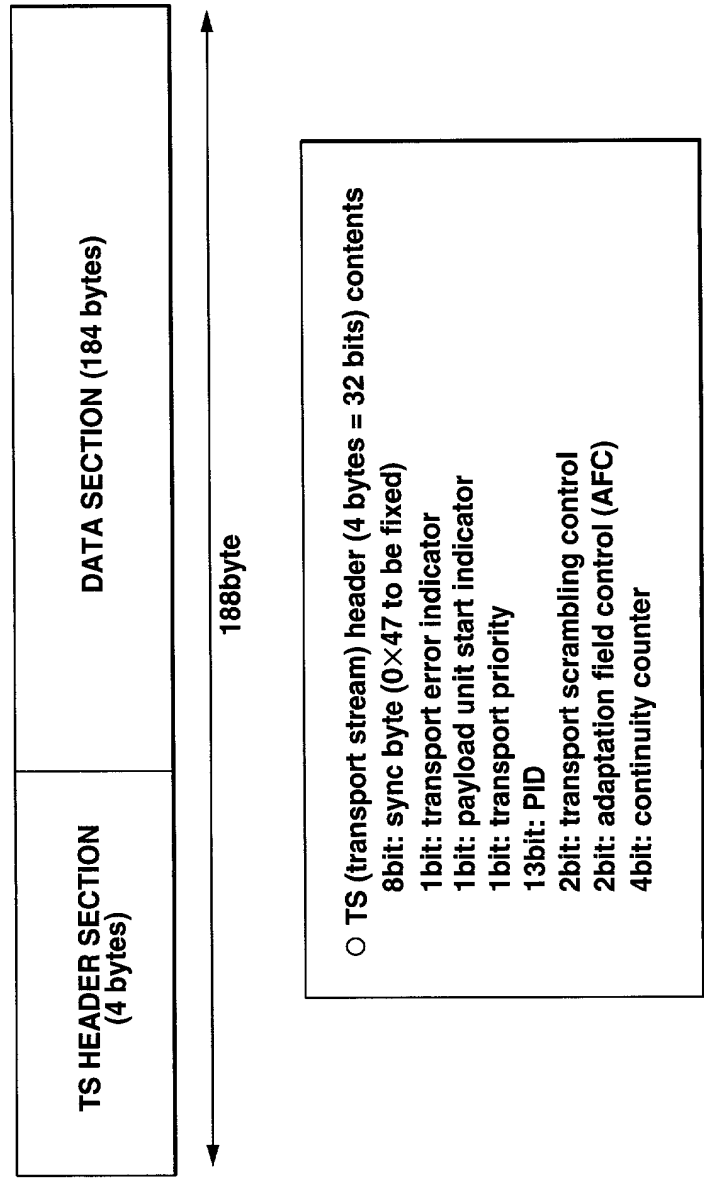


FIG.6

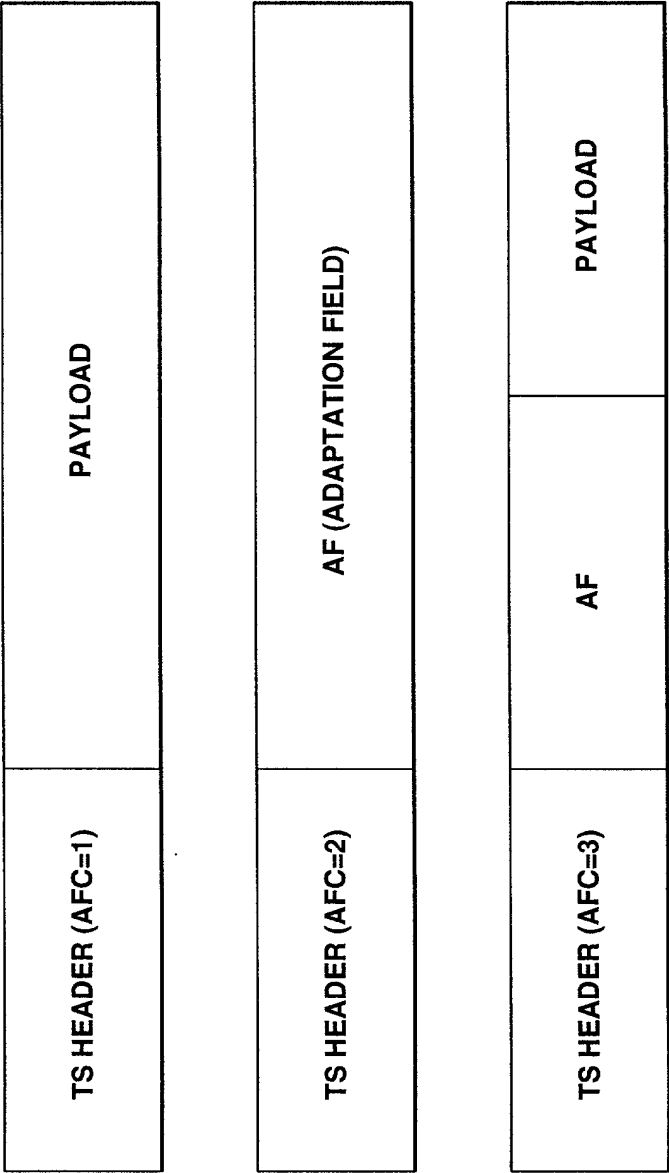


FIG.7

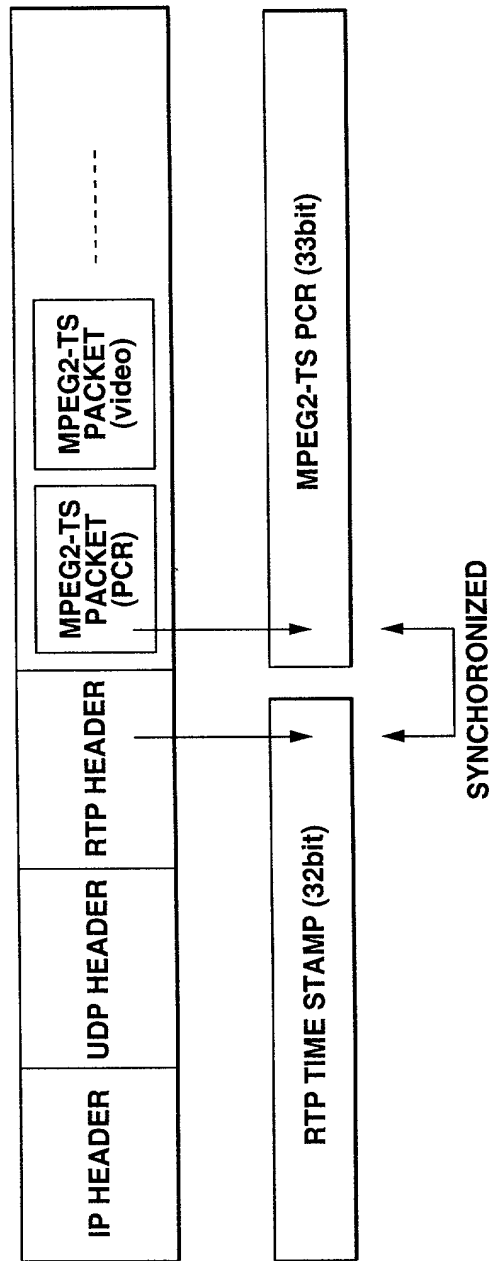


FIG.8

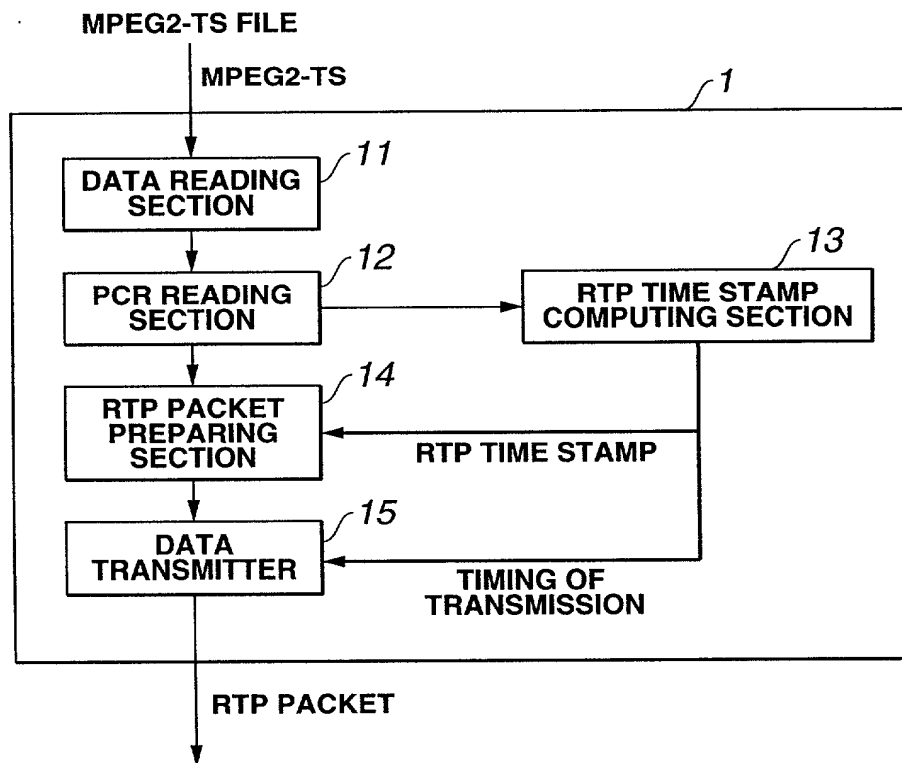


FIG.9

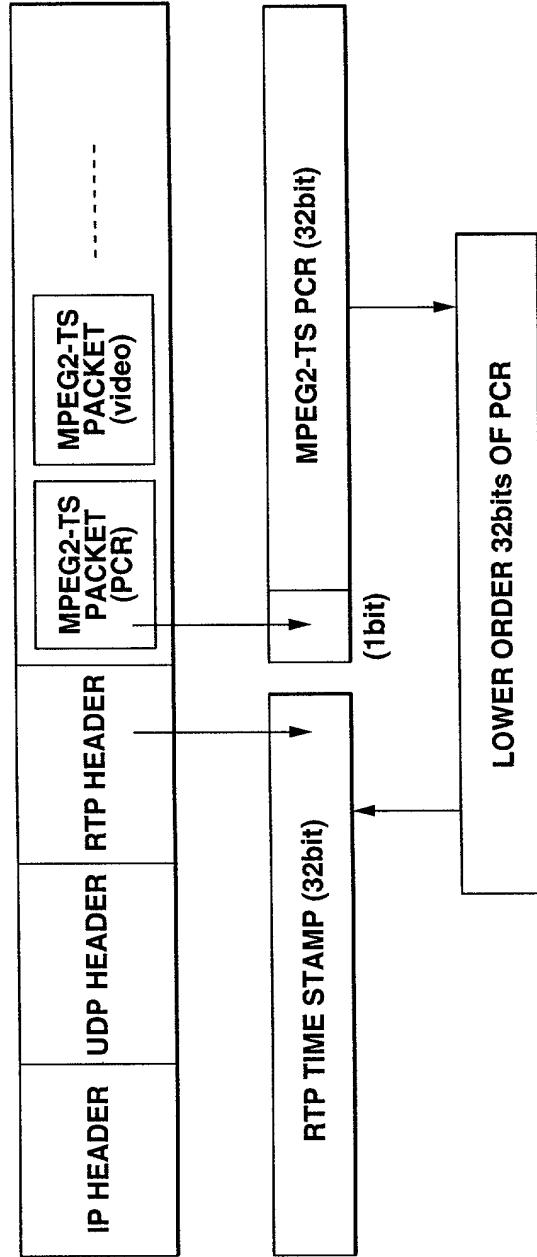


FIG.10

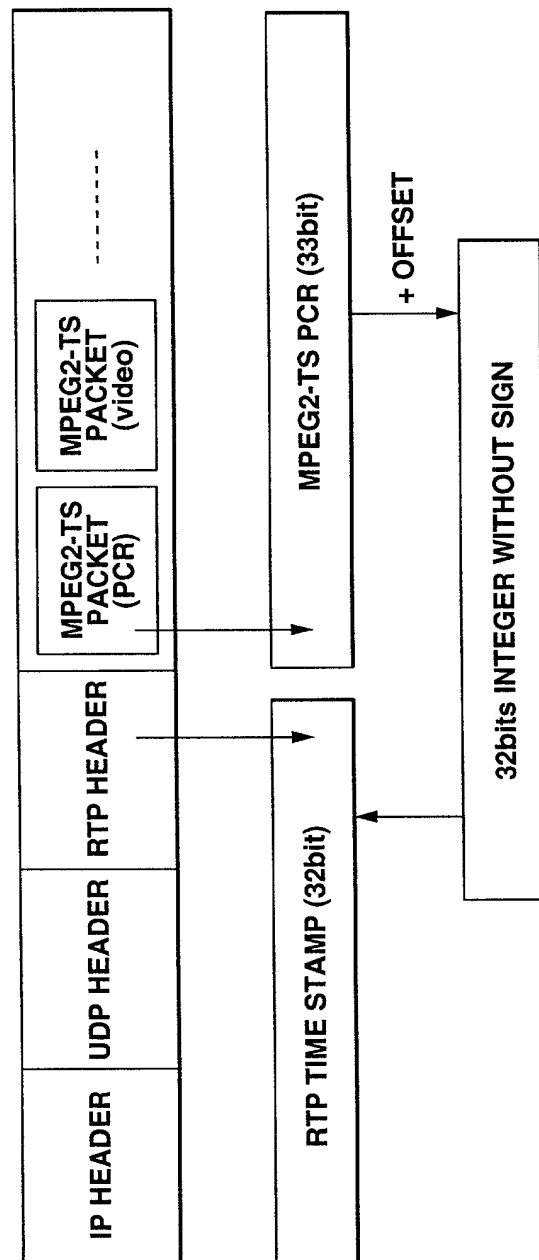


FIG.11

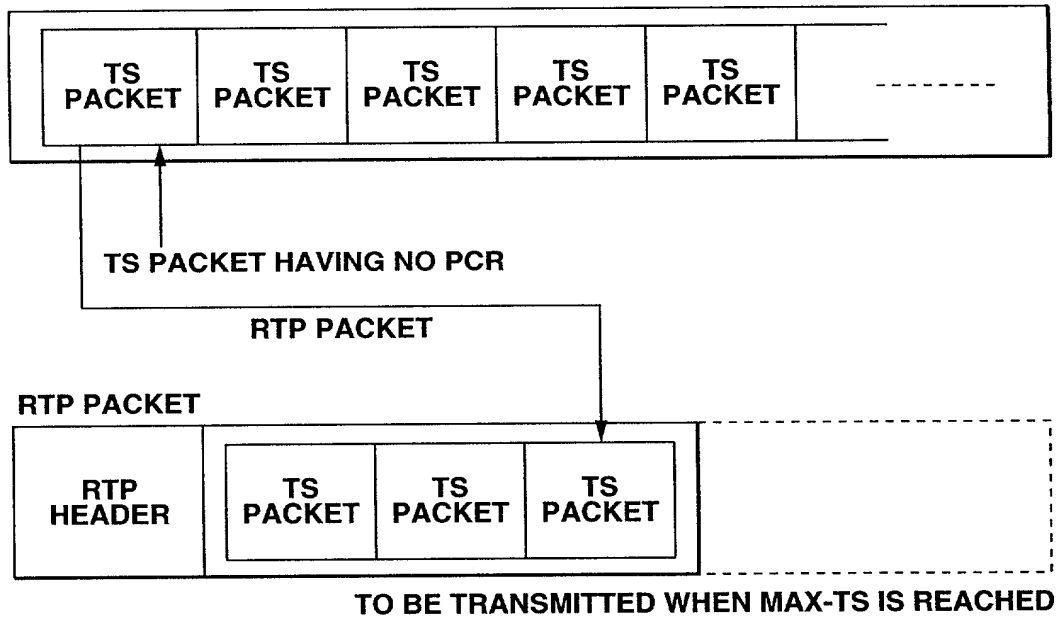


FIG.12

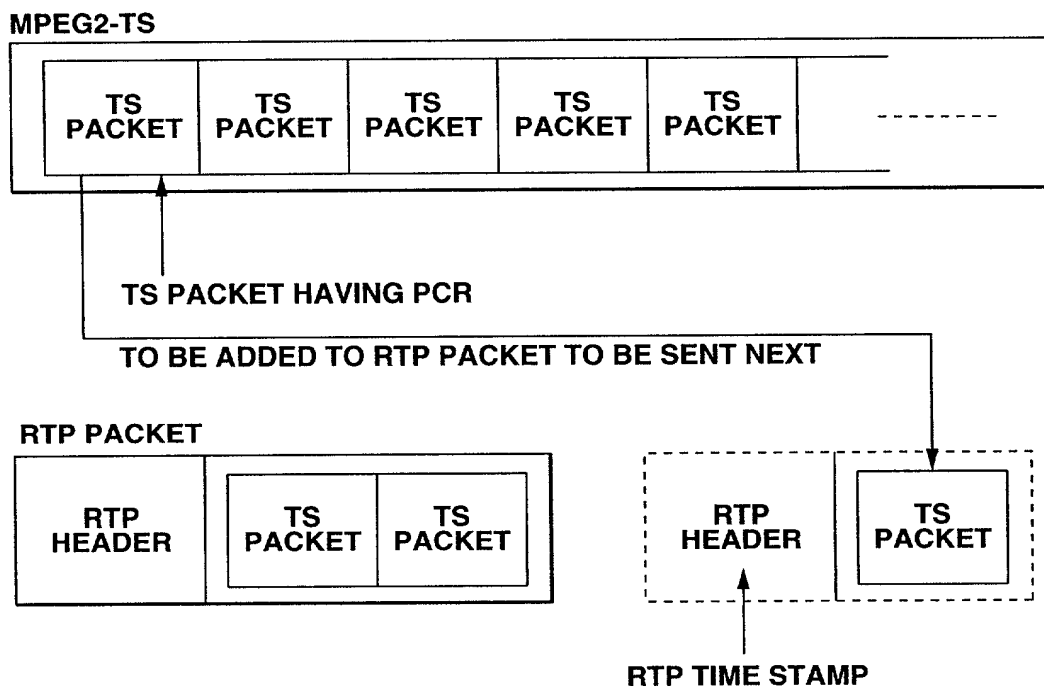


FIG.13

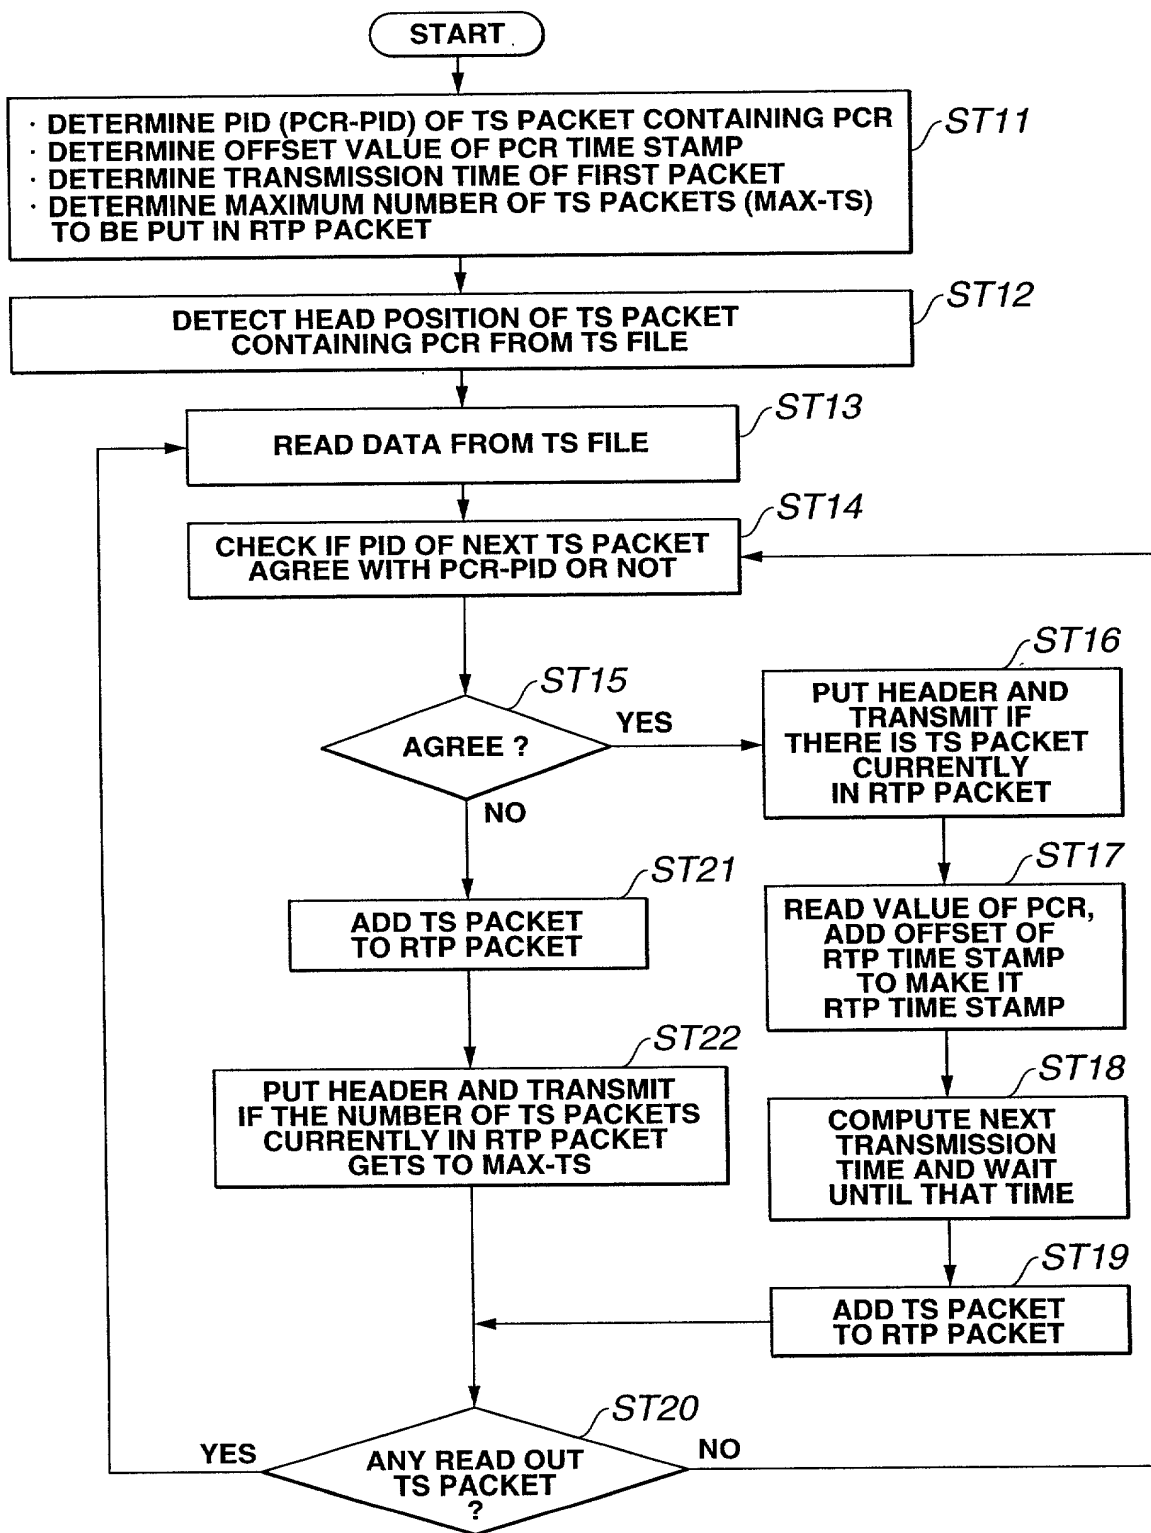


FIG.14

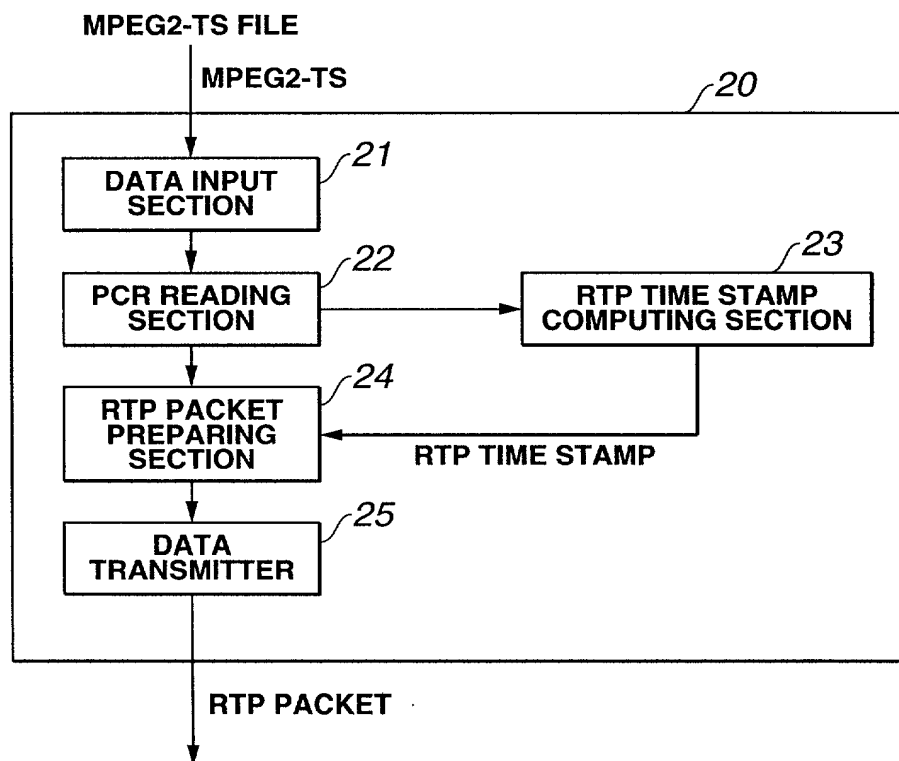


FIG.15

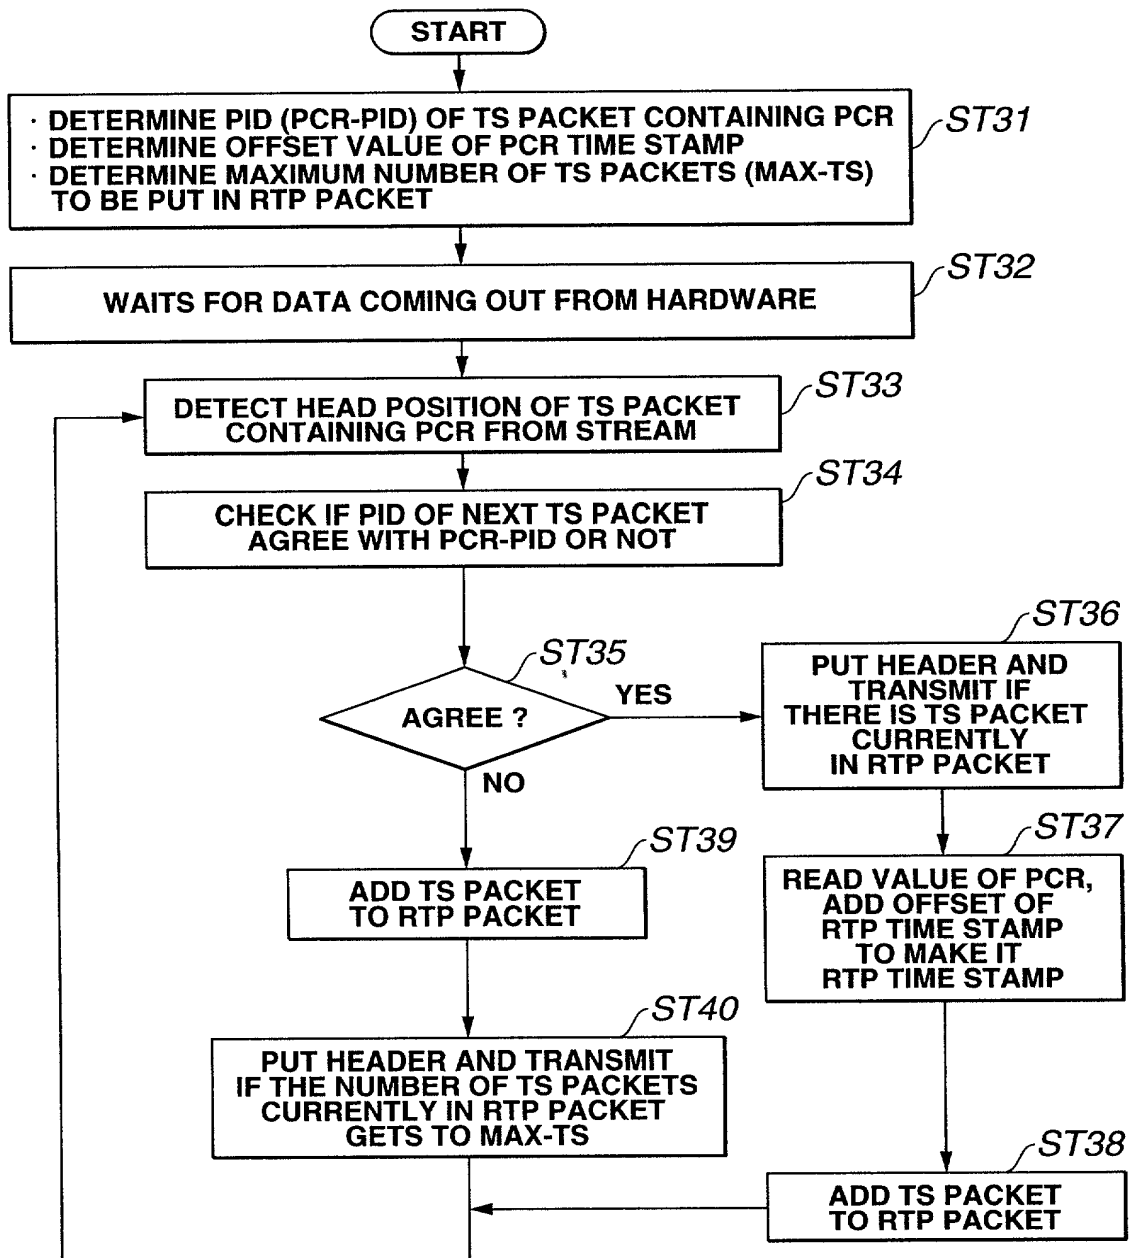


FIG.16